


# NOTAR™ LAN-XI Stand alone recorder license



## DATA RECORDING WITHOUT RANGES OR LIMITS

- No need to range inputs – simplifies setup and avoids overload and underranges
- Rugged solid state recorder – applications where no PC could survive
- Hours of battery and measurement time – the recorder is always ready when you are
- Works with any existing LAN-XI module – add stand-alone recording capabilities to your existing LAN-XI PULSE™ system

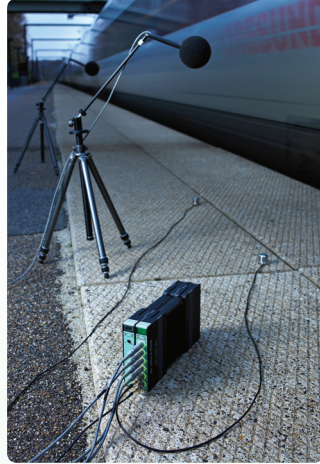

[www.bksv.com/notar](http://www.bksv.com/notar)

PULSE Reflex™ for analysis and reporting of recordings



#### ► SOLID STATE MEMORY CARD RECORDER

Small and rugged solid state memory card has no shock sensitive moving parts like tape recorders or PC hard drives

#### ► COMPACT SIZE AND LOW WEIGHT

A LAN-XI module with LAN-XI Notar™ recorder software Type BZ 7848-A is a solution that will fit almost any requirement

#### ► FULL MEASUREMENT CHAIN

- Transducer conditioning is automatically configured when using transducers with TEDS
- Seamlessly analyse and report recordings in PULSE Reflex™

#### ► COMPATIBLE

- Control using the LAN-XI module's built-in display or through most standard web browsers on a PC or Smart-Phone
- Remote control over Internet using standard LAN interface
- Data stored in WAV format for easy use in many applications including MATLAB® (registered trademark of The MathWorks, Inc.)

#### ► INPUT CHANNELS AND SAMPLING

	3050	3160*	3052	3053	3056**
Number of Channels	1-6	1-4	1-3	1-12	1-4
Freq Span (kHz)	51.2	51.2	102.4	25.6	51.2
Sample Rate (kSamples/sec)	131	131	262	65.5	131

(see LAN-XI hardware Product Data for full specifications of input channels)

\* Generator outputs not supported

\*\* Aux channels not supported

#### ► LONGER MEASUREMENTS

- Extremely long battery life, >7 hours, and ability to swap the battery in the field for even longer measurement sessions
- >7 hours recording time with included memory card (6 channels at 32 ksamples/sec, 12.8 kHz bandwidth)

#### ► RECORDING MEDIA

16 GB microSD Flash Card included

#### ► RECORDING FORMAT

WAV format plus measurement/channel information

#### ► FILE TRANSFER METHOD

SD card reader (with included SD adaptor) or remote via Ethernet connection

#### ► BATTERY TYPE 2831-A (OPTIONAL)

>7 hours (field replaceable)

#### ► LAN-XI DIMENSIONS AND WEIGHT (WITH OPTIONAL BATTERY)

- Height: 132.6 mm (5.22")
- Width: 55.0 mm (2.16")
- Depth: 250 mm (9.84")
- Weight: 1.8 kg (3.85 lb)

[www.bksv.com/notar](http://www.bksv.com/notar)